

## SC150 vertical spray coater

Double side manual spray coater for solder mask



Max. panel size 24" x 24"

max. panel thickness 8 mm (0.320")

ink free holes

Machine footprint: L= 2800mm (110 1/4") x W= 1000mm (39 1/4") x H = 2100mm ( 82 3/4")

**Solder mask process**

# SC150 manual spray coating system


## Low pressure—high volume



The panels are loaded by the operator with the aid of a transport clamp. The transport system transfers the board into the spray chamber. The automatic door closes and the spray gun start to coat the panel from one side to the other side by moving up and down the spray gun. The panel is moved along the spray gun with a pre-set speed from about 20"/Min (500mm/Min). After the first side is fully coated, the panel will be turned around and the second side will be coated. After the coating cycle is completed the automatic door opens and the panel comes out of the coating chamber. The operator can pick up the panel with the clamp handle and put the panel into a special rack ready for the drying oven.



**Full stainless steel design with quick exchange cleaning panels**

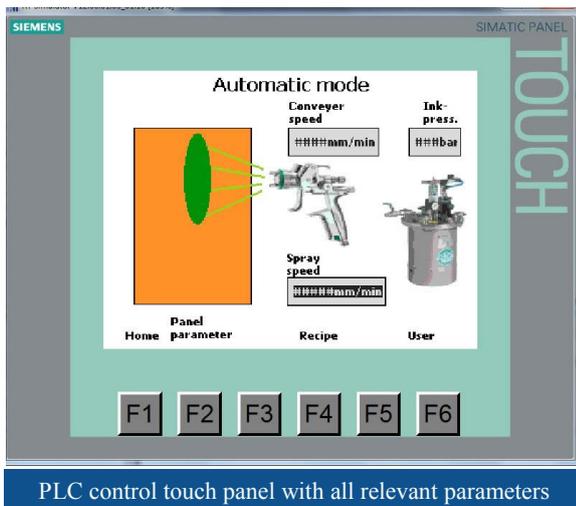

### Control System

Siemens PLC S7/1200 with Simatic touch screen control panel. Easy to program and store all necessary production parameters. In manual mode each single movement can be performed for maintenance and control reasons. Alarms with alarm description will be given in the case of a malfunction.

## TECHNICAL DATA

**COMPRESSED AIR:** 90 PSI — 6 BAR  
**ELECTRICITY:** AC 400 V 3 PHASE, 50 HZ 5 KVA  
 AC 480 V 3 PHASE, 60 HZ 5 KVA (USA)



ITC Intercircuit GmbH - Wasserburger Landstrasse 280 81827 München Germany  
 Phone (+49) 89 453604-0 Fax: (+49) 89 453604-20 [www.itc-intercircuit.de](http://www.itc-intercircuit.de)

---

ITC Intercircuit N.A. - 21625 Grenada Avenue - Lakeville, Minnesota 55044  
 Phone: 952-469-2310 Fax: 952-469-2007 [www.itcintercircuit.com](http://www.itcintercircuit.com)